




THE MISSING PIECE

Zipwake already has the widest range of standardized interceptors in the market. But one piece has always been missing – until now. We are introducing the curved interceptor IT400-E ROUND R1000 for vessels with convex hulls.

The curved bottom and blade of the interceptor allow it to be mounted closer to the edge of rounded hulls, making it more efficient and considerably faster for the required extension to be accurately controlled. The rounded interceptor can be combined with any other Zipwake interceptor to provide the perfect solution, regardless of hull design.

A CLOSER FIT

The distance between the interceptor installation and the hull's lower edge significantly impacts the system's performance. A closer fit improves the flow around the interceptor, thereby increasing lift. The possibility of rounded hulls having a curved interceptor results in faster and more precise trim control, as well as reduced wear and tear on the interceptor's internal components.

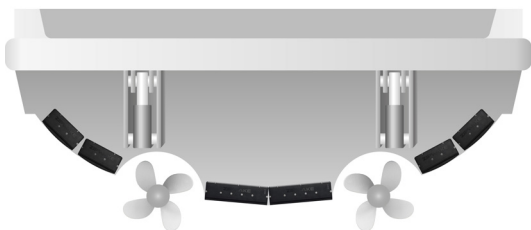


A TAILORED SET-UP

Every hull design is unique and tailored to give the boat the desired characteristics based on its intended applications. Zipwake offers an extensive range of straight, tunnel, V-shaped, and chine interceptors. With the latest addition of the curved interceptor, we now provide an efficient solution that fits virtually any hull.

25 INTERCEPTORS TO COMBINE FOR THE BEST CONFIGURATION

Zipwake has the widest range which comprises 25 fast-acting yet affordable models, providing excellent performance and making it easier to find the perfect arrangement for your unique hull design.

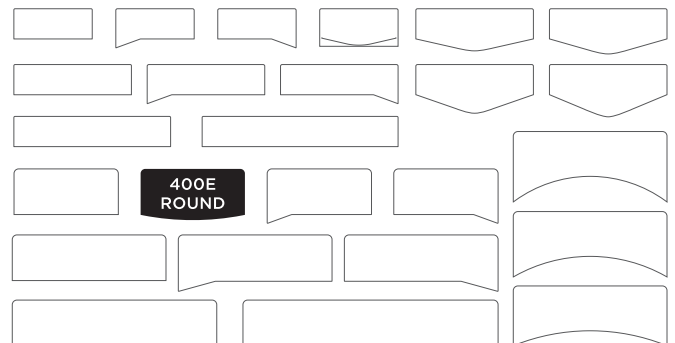


FEATURES

- **Rounded shape for maximum lift on convex hulls**
- **True outboard mount**
- **Modular design**
- **Fast actuation**
- **Submersible servo units**
 - > Brushless 12-24 V DC servo motor
 - > High-precision positioning
 - > Calibration free
 - > Durable and accessible
- **Integrated mounting plate**
- **Auto cleaning**
 - > Periodically selectable cleaning cycle
 - > Prevents fouling inside the interceptor
- **Thru-hull fitting options**
 - > Above waterline
 - > Concealed behind interceptor
- **No corrosive materials**

SPECIFICATIONS

MODEL	IM
MAX. BOAT SPEED	60 knots
BLADE STROKE	60 mm (2.4 in)
BLADE RATE	40 mm/s (2.6 in/s)
THRU-HULL CABLE FITTING	Concealed or above waterline
SERVO ACTUATOR	SU-E
CABLE LENGTH	3 m (10 ft), extendable up to 6 m (20 ft)
CABLE MATERIAL	PUR
CONNECTOR	M12 5-pin circular
CONNECTOR DIAMETER	14.5 mm (0.57 in)
SUPPLY VOLTAGE	12-32 V DC
POWER CONSUMPTION	25 W max/servo unit
OPERATING TEMPERATURE	0 ° to +40 °C (+32 ° to +104 °F)
STORAGE TEMPERATURE	-40 ° to +90 °C (-40 ° to +194 °F)
WATERPROOF RATING	IP68 5 m (16 ft)
COMPLIANCE	CE, FCC
SERVO UNITS	Single
LENGTH	400 mm (15.7 in)
WEIGHT	5.2 kg (11.5 lbs)

DIMENSIONS

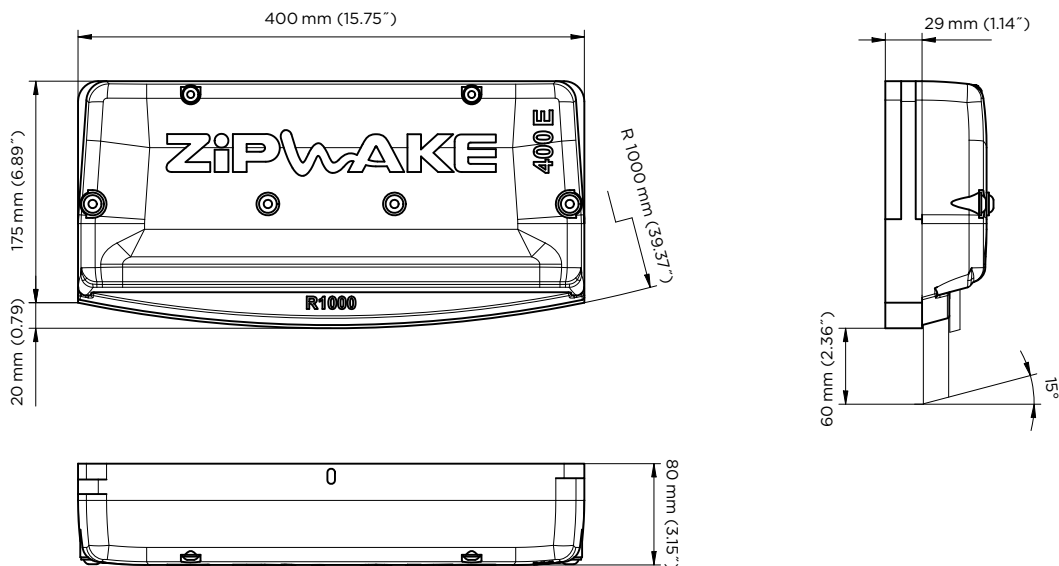

ORDERING DATA

MODEL	IM
PART NO.	2012491

• Available as an accessory

• Available as a spare part